



UNiLUX

---

GALY 1200

# GALY 1200



Galy 1200 lamp with a sober design is ideal for small individual offices. Its flexible arm can be rotated 360°. You can easily adjust the direction of lighting towards your work area. Its compact size and light weight will allow you to carry it anywhere with you (train, plane, home,...). Thanks to its USB port (cord provided), it can be recharged in 2 hours and a half on any USB port (PC, laptop, Power bank ,...).

# GALY 1200



- **Nomad lamp:** wireless and thanks to its low weight of 210g, GALY 1200 is easily transported from one workspace to another (office, meeting room, co-working spaces).
- **Compact:** once folded, this lamp can now accompany you on your travels (transport).
- **High-efficiency 1200 mAh Lithium-Ion battery:** it offers a battery life of 2h and can easily be recharged of 2h30 via its 1 m USB cable (supplied).
- **27 cm arm:** fully flexible swivel in all directions to adjust lighting in the right place on your worktop.
- **Light intensity variation:** by pressing the touch button continuously.
- **Protect your eyes:** this floor lamp offers a pleasant, stable, quality light thanks to the latest generation LED protected by an opaque plastic. No flicker or glare.

Warranty: 2 years

Maximum height: 30 cm / minimum height: 25 cm


Materials: base and head in ABS plastic / metal arm with rubber surface



Professional replaceable light source (LED only)

## Characteristics


Measurement in Lux on the worktop  
in top view at 35 cm:

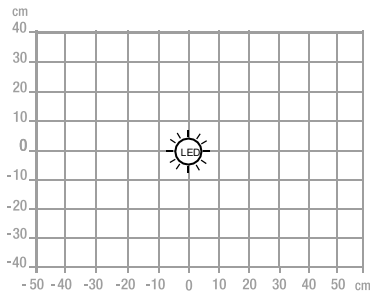


> 500 Lux

< 500 Lux

Measurement in Lux on the worktop  
in profile view at 35 cm:

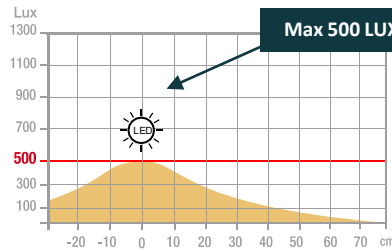

Measurement in nanometers  
of the light spectrum

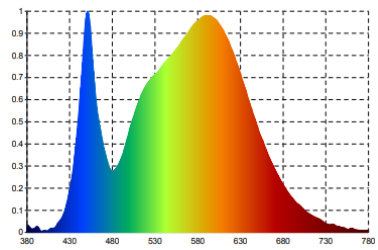


- 0 No-risk
- 1 Low-risk
- 2 Moderate-risk
- 3 High-risk

SAP no.	400132276
EAN code	3595560030194
Colors	White
Luminous flow	418
Lux at 35cm	500
Lm/W	139
Color T° ( K )	5800
CRI	82
Source Lifetime (h)	50 000
Energy consumption (kWh/1000 h)	3
USB Port	No
Inductive charger	No
Net weight (kg)	0,21

# OUR CSR COMMITMENTS

1. All our lighting are **100% repairable** thus limiting planned obsolescence.
2. Reduce our carbon footprint through our **ECO-DESIGN THINKING** approach.
3. Contribute to the preservation of the planet's natural resources by promoting the use of **recycled materials**.
4. Optimize our packaging to control our **transport costs**.
5. Highlight the **talent of our employees** by ensuring social equality.

## Energy class

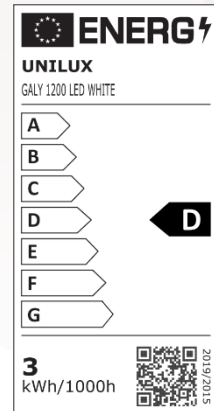


# OUR EXPERTISE

## 1-Why use auxiliary lighting?

We are regularly subjected to constant artificial lighting in the office, which takes no account of our biological rhythms. Poor lighting quality can cause headaches, sleep disorders and loss of concentration. According to a recent study, only 34% of offices achieve the level of illumination of 500 lux recommended by Occupational Medicine in accordance with DIN EN 12464-1\*.

## 2-How to light your workspace?

- Position the lamp head at least 35 cm above the worktop. work surface.
- Place the lamp on the opposite side to the hand that is holding the mouse or writing.
- Use lamps with asymmetrical lighting to reduce eyestrain, which can lead to eye irritation, headaches, loss of concentration, reduced productivity, etc.
- Position the lamp so that it is easy to adjust and so that the light is in the right place.
- Avoid reflections from shiny surfaces.
- Limit direct glare from bright light in the field of vision and indirect glare from bright light in the field of vision. in the field of vision and indirect glare from the reflection of light from the reflection of light in the field of vision, on a work surface walls or objects.

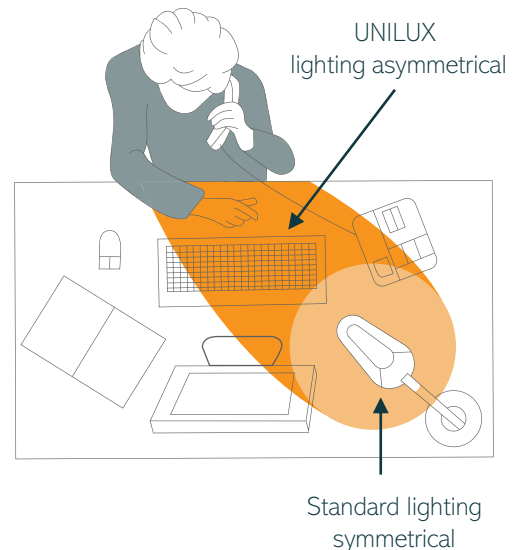

# OUR CERTIFICATIONS

Unilux is committed to an eco-responsible approach and ensures that its products respect this commitment. Indeed, we are very concerned about current environmental issues and we aspire to respond as best as possible to the concerns of our consumers on this subject. Sustainable development is at the heart of our strategy and we act for the environment. You will find below the different certifications that Unilux has and that prove its environmental commitment.



# UNILUX

\* DIN EN 12464-1 (DIN 5035-1): European standard which determines the lighting requirements for workstations in closed places, these satisfying the needs of comfort and visual performance. DIN EN 12464-1 replaced DIN 5035-1



# USER GUIDE

**i**

x1

1 min

[www.my-unilux.com](http://www.my-unilux.com)

**+**

(A) x1

(B) x1

Flexible

(A)

30 cm

Ø : 13 cm

The dimmer increases or decreases the brightness

0.5sc

Charges on USB port (cable included)

**Autonomy of 3h**  
**Charging time: 2.5h**

## 30 products available on pCon Planner

You will be able to obtain data on many UNILUX or OFML standard products and integrate them quickly and easily into 3D space layouts via pCon.



## Download on our E-shop

Always available: photos in HD, data sheets, instruction manual, repairability instructions for all our products.



## Do you have any questions?

Our after-sales service is always at your disposal

Tèl: +33 1 81 86 06 03

E-mail: [contact.unilux@hamelinbrands.com](mailto:contact.unilux@hamelinbrands.com)

17 avenue du Parc TECHNOPOLES

91380 Chilly Mazarin – France

Tèl: +33 1 81 86 06 00

[www.my-unilyx.com](http://www.my-unilyx.com)

E-mail: [contact.unilux@hamelinbrands.com](mailto:contact.unilux@hamelinbrands.com)

UNILUX