



UNILUX

---

UKKY



UKKY a lamp with a sober design is ideal for small individual offices. Its flexible arm can be rotated 360°. You can easily adjust the direction of lighting towards your work area. Its compact size and light weight will allow you to carry it anywhere with you (train, plane, home,...)



- **Nomadic lamp:** wireless and thanks to its low weight of 190g, UKKY is easily transported from one workspace to another (office, meeting room, co-working spaces).
- **Practical:** can be plugged directly into a USB port with a 1 m cord provided or works with 3 1.5V AA batteries (not included).
- **Compact:** once folded, this lamp can now accompany you on your travels.
- **27 cm arm:** fully flexible, adjustable in all directions to adjust the lighting to the right place on your work surface.
- **Light intensity variation:** by continuous pressure on the touch button.
- **Protect your eyes:** this floor lamp offers pleasant, stable, quality light thanks to the latest generation LEDs protected by opaque plastic. No flicker or glare.

Warranty: 2 years

Height: 30 cm


Materials: ABS plastic base and head/ metal arm with rubberized surface



Professional replaceable light source (LED only)

## Characteristics


Measurement in Lux on the worktop in top view at 28 cm:

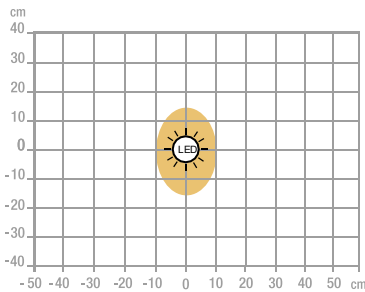

> 500 Lux


< 500 Lux

Measurement in Lux on the worktop in profile view at 28 cm:

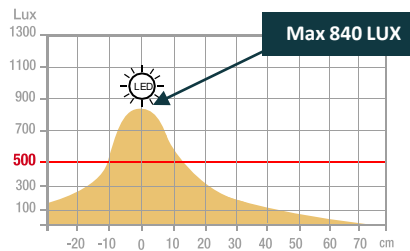

Max 840 LUX

Measurement in nanometers of the light spectrum

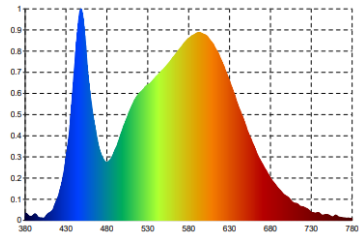


- 0 No-risk
- 1 Low-risk
- 2 Moderate-risk
- 3 High-risk

SAP no.	400140699
EAN code	3595560030293
Colors	White
Luminous flow	335
Lux at 35cm	840
Lm/W	112
Color T° ( K )	4200
CRI	84
Source Lifetime (h)	20 000
Energy consumption (kWh/1000 h)	3
USB Port	No
Inductive charger	No
Net weight (kg)	0,19

# OUR CSR COMMITMENTS

1. All our lighting are **100% repairable** thus limiting planned obsolescence.
2. Reduce our carbon footprint through our **ECO-DESIGN THINKING** approach.
3. Contribute to the preservation of the planet's natural resources by promoting the use of **recycled materials**.
4. Optimize our packaging to control our **transport costs**.
5. Highlight the **talent of our employees** by ensuring social equality.

## Energy class

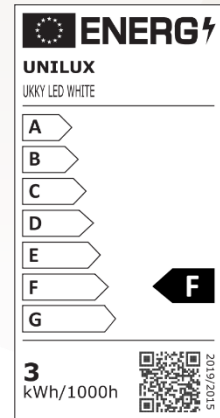


# OUR EXPERTISE

## 1-Why use auxiliary lighting?

We are regularly subjected to constant artificial lighting in the office, which takes no account of our biological rhythms. Poor lighting quality can cause headaches, sleep disorders and loss of concentration. According to a recent study, only 34% of offices achieve the level of illumination of 500 lux recommended by Occupational Medicine in accordance with DIN EN 12464-1\*.

## 2-How to light your workspace?

- Position the lamp head at least 35 cm above the worktop. work surface.
- Place the lamp on the opposite side to the hand that is holding the mouse or writing.
- Use lamps with asymmetrical lighting to reduce eyestrain, which can lead to eye irritation, headaches, loss of concentration, reduced productivity, etc.
- Position the lamp so that it is easy to adjust and so that the light is in the right place.
- Avoid reflections from shiny surfaces.
- Limit direct glare from bright light in the field of vision and indirect glare from bright light in the field of vision. in the field of vision and indirect glare from the reflection of light from the reflection of light in the field of vision, on a work surface walls or objects.

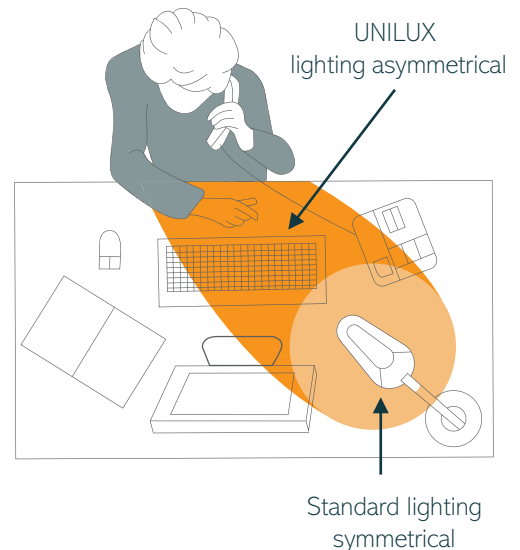

# OUR CERTIFICATIONS

Unilux is committed to an eco-responsible approach and ensures that its products respect this commitment. Indeed, we are very concerned about current environmental issues and we aspire to respond as best as possible to the concerns of our consumers on this subject. Sustainable development is at the heart of our strategy and we act for the environment. You will find below the different certifications that Unilux has and that prove its environmental commitment.





La marque de la gestion forestière responsable



# UNILUX

\* DIN EN 12464-1 (DIN 5035-1): European standard which determines the lighting requirements for workstations in closed places, these satisfying the needs of comfort and visual performance. DIN EN 12464-1 replaced DIN 5035-1

# USER GUIDE

**i** x1 1 min 

 [www.my-unilux.com](http://www.my-unilux.com)

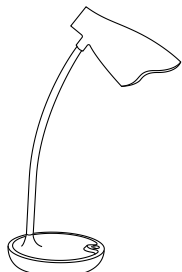
**+**  (A) x1 (B) x1 


Flexible 27 cm


30cm

Ø : 12,0 cm


(A)

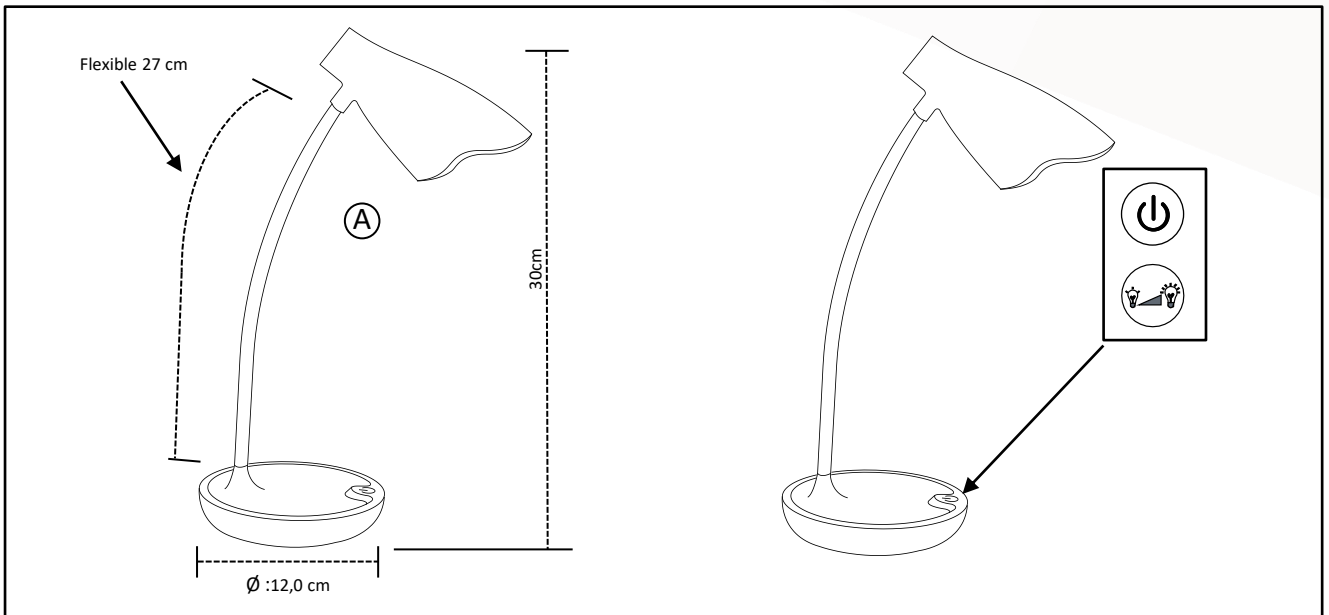


 Dimmer switch increases or decreases brightness

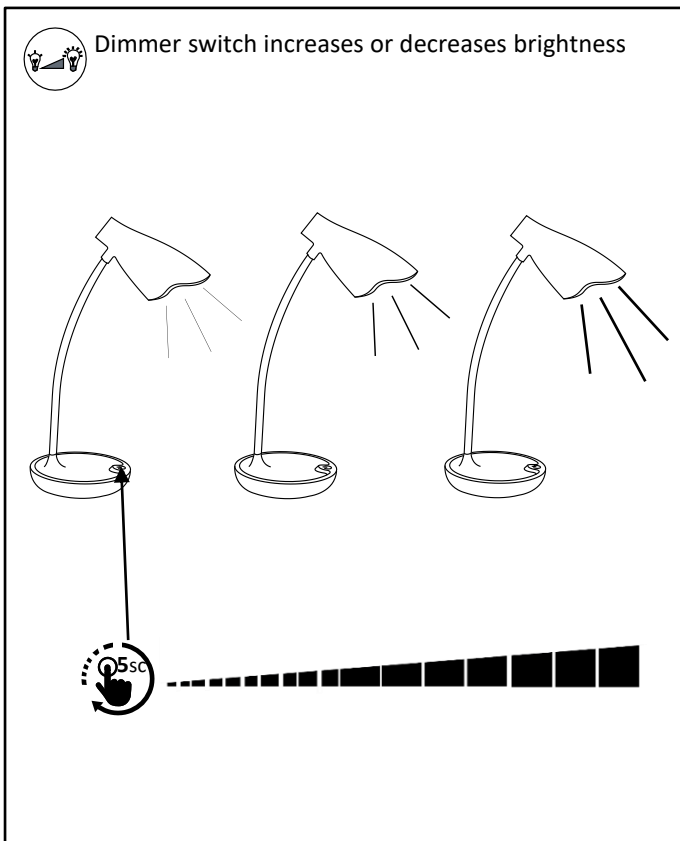

**Option 1** Connects to USB port (cable supplied) and put the button on ON position

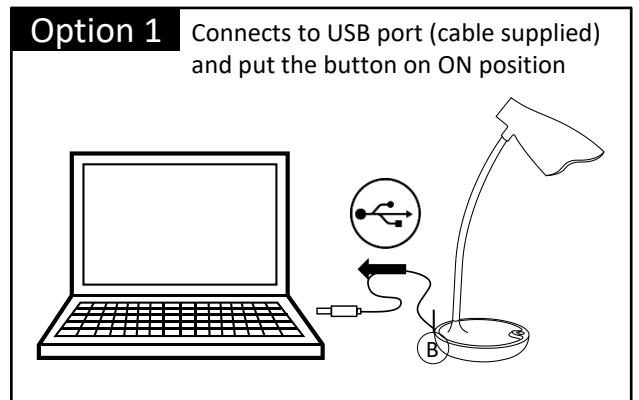

**Option 2**

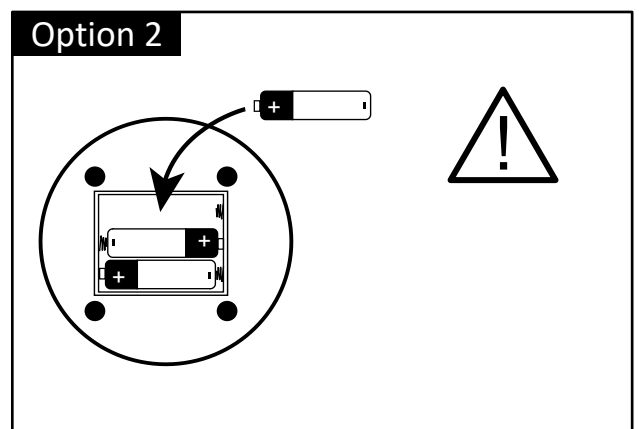

## 30 products available on pCon Planner

You will be able to obtain data on many UNILUX or OFML standard products and integrate them quickly and easily into 3D space layouts via pCon.



## Download on our E-shop

Always available: photos in HD, data sheets, instruction manual, repairability instructions for all our products.



## Do you have any questions?

Our after-sales service is always at your disposal

Tèl: +33 1 81 86 06 03

E-mail: [contact.unilux@hamelinbrands.com](mailto:contact.unilux@hamelinbrands.com)

17 avenue du Parc TECHNOPOLES

91380 Chilly Mazarin – France

Tèl: +33 1 81 86 06 00

[www.my-unilyx.com](http://www.my-unilyx.com)

E-mail: [contact.unilux@hamelinbrands.com](mailto:contact.unilux@hamelinbrands.com)

UNILUX