



UNILUX

KATY

KATY



Natural style: The base of KATY is made of wood with an original color and grain, it is charming with its soft fabric lampshade. A classic and simple design that adapts perfectly to a modern decoration, European style.

UNILUX



- **Natural Style:** Bamboo frame and soft fabrics shade. It's Scandinavian and refined design will both in the office and at home.
- **Soft Light:** The shade is made of heat resistant fabric that is easy to clean, the light is soft and friendly to the eyes.
- **Stable:** The three feet with their felt pads ensure perfect stability and will not scratch your surfaces.
- **Easy access on/off:** switch on the cable.
- **Bulb Supplied:** E14 bulb LED supplied with the lamp. Bulb max 5W
- **Installation and Packaging:** Quick installation with a few simple steps. You can finish the installation very quickly by following the installation manual.


Warranty: 2 years
 Height: 46 cm
 Materials: bamboo structure/ fabric shade



End user replaceable light source (LED only)

Characteristics


Measurement in Lux on the worktop in top view at 35 cm:

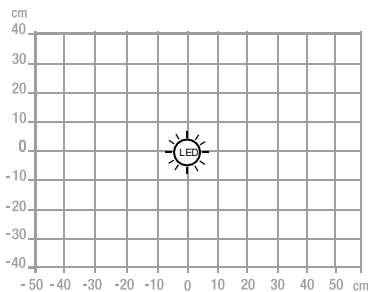


> 500 Lux

< 500 Lux

Measurement in Lux on the worktop in profile view at 35 cm:

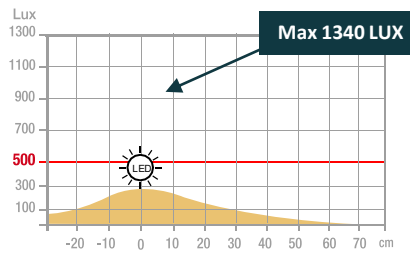

Measurement in nanometers of the light spectrum

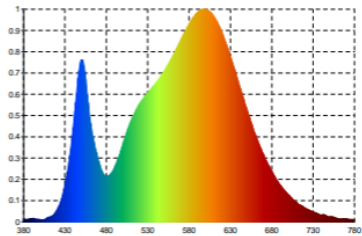


- 0 No-risk
- 1 Low-risk
- 2 Moderate-risk
- 3 High-risk

SAP no.	400165041
EAN code	3595560034529
Colors	White/Bamboo
Luminous flow	594
Lux at 35cm	290
Lm/W	119
Color T° (K)	3000
CRI	83
Source Lifetime (h)	30000
Energy consumption (kWh/1000 h)	11
USB Port	No
Inductive charger	No
Net weight (kg)	0,48

OUR CSR COMMITMENTS

1. All our lighting are **100% repairable** thus limiting planned obsolescence.
2. Reduce our carbon footprint through our **ECO-DESIGN THINKING** approach.
3. Contribute to the preservation of the planet's natural resources by promoting the use of **recycled materials**.
4. Optimize our packaging to control our **transport costs**.
5. Highlight the **talent of our employees** by ensuring social equality.

Energy class

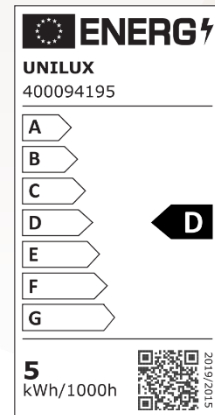


OUR EXPERTISE

1-Why use auxiliary lighting?

We are regularly subjected to constant artificial lighting in the office, which takes no account of our biological rhythms. Poor lighting quality can cause headaches, sleep disorders and loss of concentration. According to a recent study, only 34% of offices achieve the level of illumination of 500 lux recommended by Occupational Medicine in accordance with DIN EN 12464-1*.

2-How to light your workspace?

- Position the lamp head at least 35 cm above the worktop. work surface.
- Place the lamp on the opposite side to the hand that is holding the mouse or writing.
- Use lamps with asymmetrical lighting to reduce eyestrain, which can lead to eye irritation, headaches, loss of concentration, reduced productivity, etc.
- Position the lamp so that it is easy to adjust and so that the light is in the right place.
- Avoid reflections from shiny surfaces.
- Limit direct glare from bright light in the field of vision and indirect glare from bright light in the field of vision. in the field of vision and indirect glare from the reflection of light from the reflection of light in the field of vision, on a work surface walls or objects.

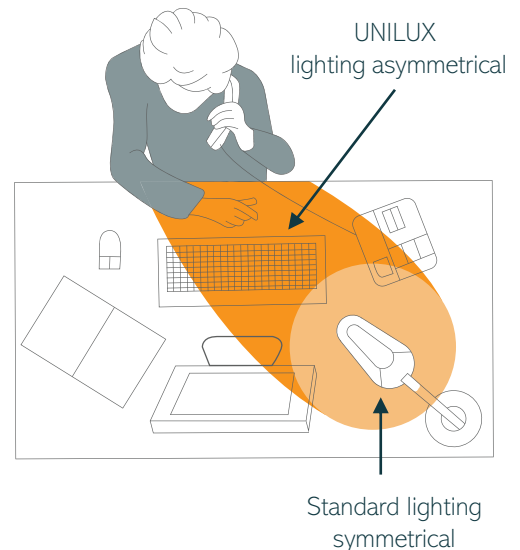



OUR CERTIFICATIONS

Unilux is committed to an eco-responsible approach and ensures that its products respect this commitment. Indeed, we are very concerned about current environmental issues and we aspire to respond as best as possible to the concerns of our consumers on this subject. Sustainable development is at the heart of our strategy and we act for the environment. You will find below the different certifications that Unilux has and that prove its environmental commitment.



UNILUX

* DIN EN 12464-1 (DIN 5035-1): European standard which determines the lighting requirements for workstations in closed places, these satisfying the needs of comfort and visual performance. DIN EN 12464-1 replaced DIN 5035-1

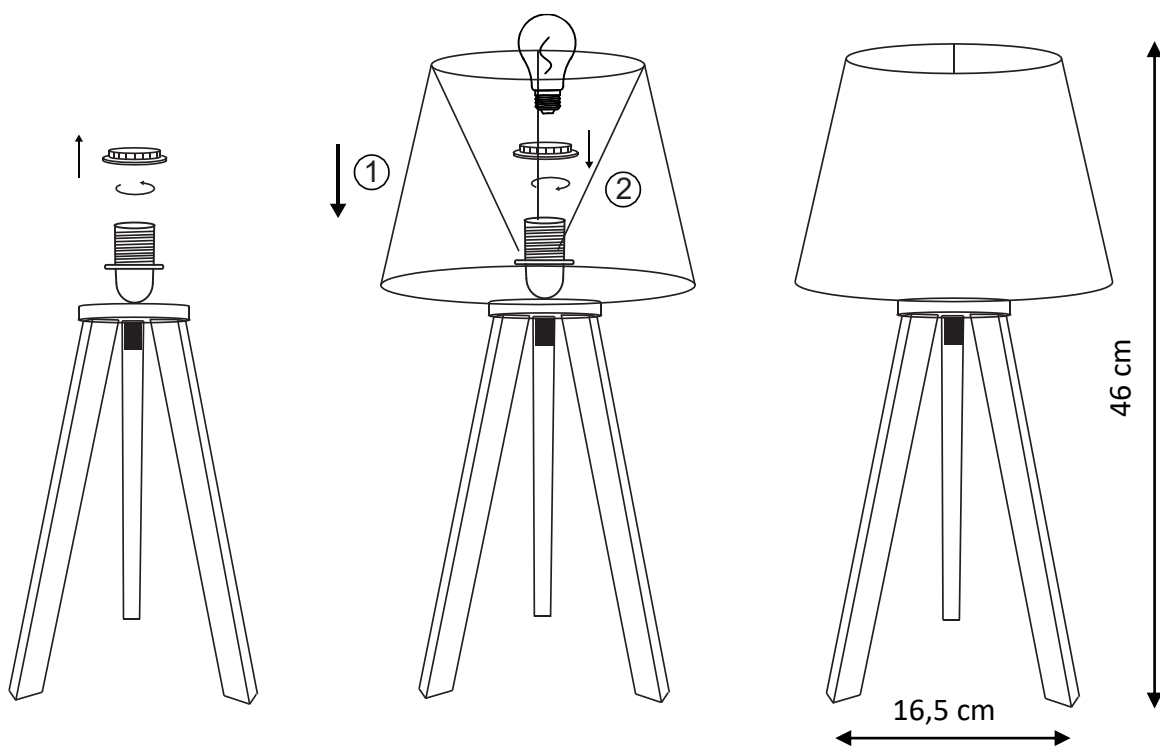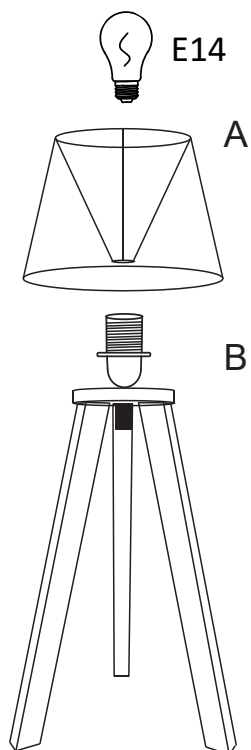

30 products available on pCon Planner

You will be able to obtain data on many UNILUX or OFML standard products and integrate them quickly and easily into 3D space layouts via pCon.



Download on our E-shop

Always available: photos in HD, data sheets, instruction manual, repairability instructions for all our products.



Do you have any questions?

Our after-sales service is always at your disposal

Tèl: +33 1 81 86 06 03

E-mail: contact.unilux@hamelinbrands.com

17 avenue du Parc TECHNOPOLES

91380 Chilly Mazarin – France

Tèl: +33 1 81 86 06 00

www.my-unilyx.com

E-mail: contact.unilux@hamelinbrands.com

UNILUX