



UNILUX

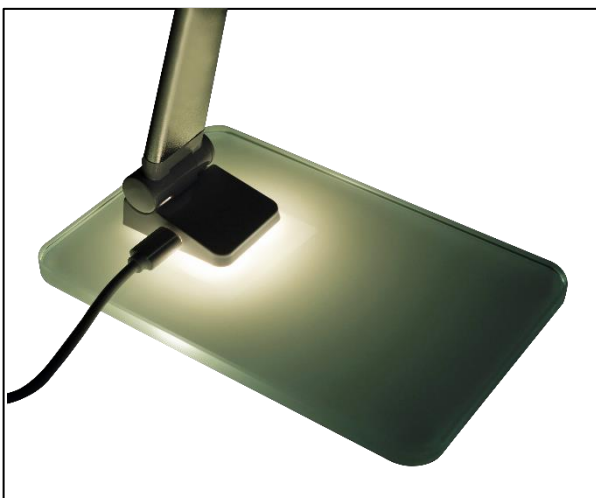
POPY

POPY white



POPY differentiates itself has a particular design giving it an elegant and contemporary character. Mobile thanks to its unhookable USB cable based on its 220V driver, it can be connected directly to a USB port (computer or wall socket) and accompany you in all your travels (office, meeting room or when traveling).

POPY black



UNILUX



- **The + product:** Ideal to store it in a drawer or a bag to accompany you on your travels (office, meeting room, traveling). Can connect directly to a USB port
- **Variation of light intensity and color temperature:** on the base, the touch switch allows to vary the 3 color temperature levels by a brief pressure and the light intensity by a continuous pressure.
- **Modern design lamp:** it stands out for its fine and clean lines supported by its glass base. The combination of glass and aluminum makes the POPY the perfect accessory to add a touch of modernism to your office.
- **Night Light Mode:** Provides soft light located at base level that can be used as a night light.
- **Stability and solidity:** its weighted and resistant glass base with a thickness of 0.8 cm ensures perfect stability of the lamp wherever you place it.
- **Low visual stress after prolonged use:** ideal for working, reading or studying, at home or in the office
- **Available in 2 colors:** black and white

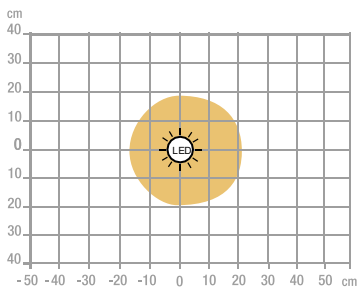
Warranty: 2 years
 Max height: 38 cm/ minimum height: 25 cm
 Materials: glass base/arm and aluminum head



Professional replaceable light source (LED only)

Characteristics

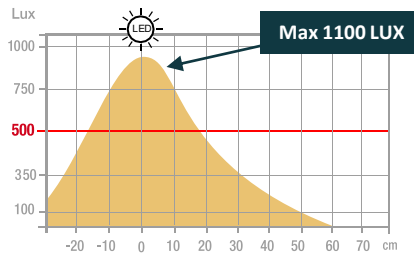
Lux measurement on the work surface in top view at 35 cm:



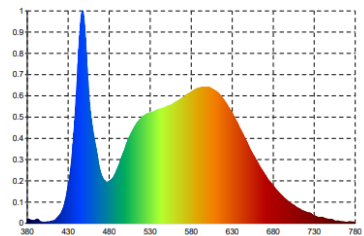
> 500 Lux

< 500 Lux

Lux measurement on the work surface in profile view at 35 cm:



Measurement in nanometers of the light spectrum



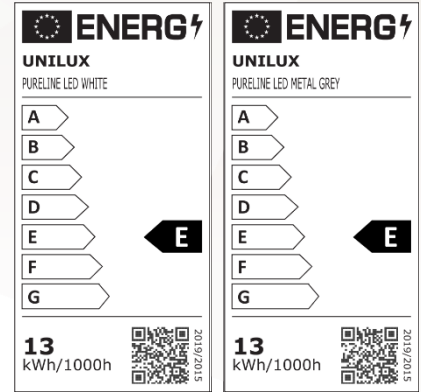
- 0 No-risk
- 1 Low-risk
- 2 Moderate-risk
- 3 High-risk

SAP no.	400124478	400153693
EAN code	3595560029433	3595560031665
Color	White/grey metal	Black
Luminous flow	408	408
Lux at 35cm (Lx)	1100 cm	1100 cm
Lm/W	82	82
Color T* (K)	3000/4500/7000	3000/4500/7000
CRI	>84	>84
Source lifetime (h)	50 000	50 000
Energy consumption (kWh/1000 h)	5	5
USB Port	Yes	Yes
Inductive charger	No	No
Net weight (kg)	0,55	0,55

OUR CSR COMMITMENTS

1. All our lighting are **100% repairable** thus limiting planned obsolescence.
2. Reduce our carbon footprint through our **ECO-DESIGN THINKING** approach.
3. Contribute to the preservation of the planet's natural resources by promoting the use of **recycled materials**.
4. Optimize our packaging to control our **transport costs**.
5. Highlight the **talent of our employees** by ensuring social equality.

Energy class



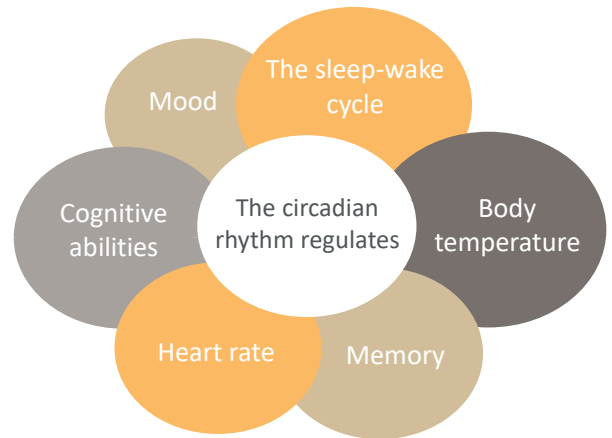
OUR EXPERTISE

1-Why use accent lighting?

We are regularly subjected to constant artificial lighting in the office that does not take into account our biological rhythm. Poor lighting quality can cause headaches, sleep disorders, loss of concentration. According to a recent study, only 34% of offices reach the lighting level of 500 lux recommended by Occupational Medicine.

2-Biodynamic light: source of well-being!

An adapted biodynamic light that accompanies you on a daily basis is essential to be effective in your work, your projects in order to prevent any harmful consequences produced by poor lighting. Your productivity will be greatly improved, you will be more dynamic and in a better mood. This is the reason why each individual must carefully follow his "circadian rhythm". The circadian rhythm is a biological rhythm that governs a set of physiological processes in humans. It is regulated by light for 24 hours.







OUR CERTIFICATIONS

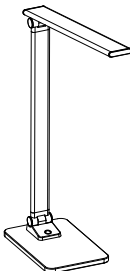


Unilux is committed to an eco-responsible approach and ensures that its products respect this commitment. Indeed, we are very concerned about current environmental issues and we aspire to respond as best as possible to the concerns of our consumers on this subject. Sustainable development is at the heart of our strategy and we act for the environment. You will find below the different certifications that Unilux has and that prove its environmental commitment.



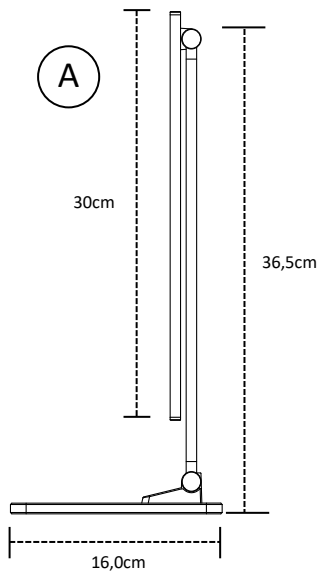
USER GUIDE

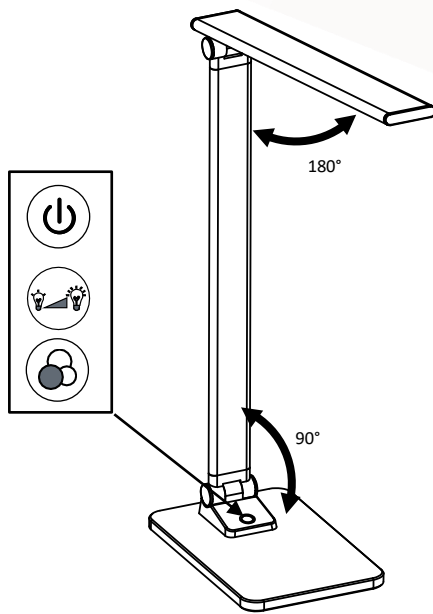
i  x1  1 min 


 www.my-unilux.com

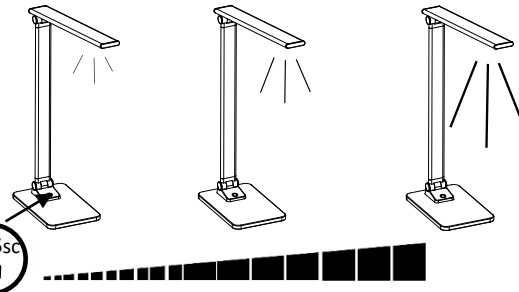
⚙️  (A) x1  (B) x1  (C) x1

INPUT : 100-240V ~ 50/60 Hz
EXIT : DC 5V, 1A

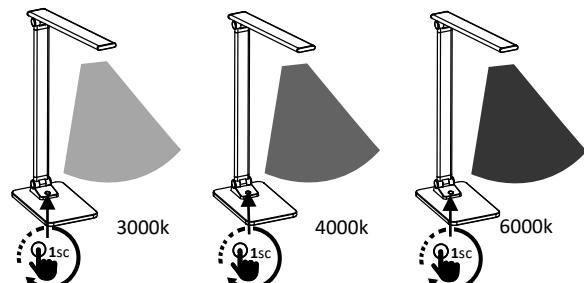
A  30cm, 36,5cm, 16,0cm

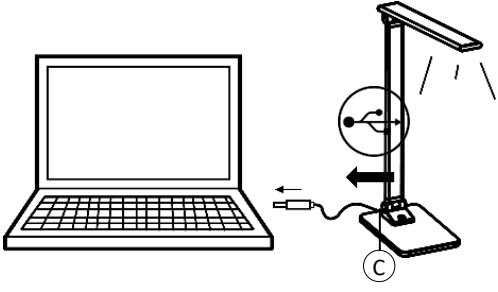
 180°, 90°

 Dimming switch to increase or decrease brightness

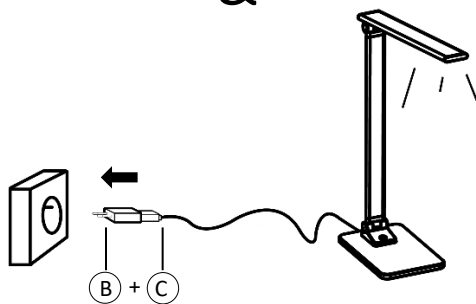
 5sc

⊝ 3 adjustable color temperatures

 3000k, 4000k, 6000k, 1sc

 (C)

&

 (B) + (C)

30 products available on pCon Planner

You will be able to obtain data on many UNILUX or OFML standard products and integrate them quickly and easily into 3D space layouts via pCon.



Download on our E-shop

Always available: photos in HD, data sheets, instruction manual, repairability instructions for all our products.



Do you have any questions?

Our after-sales service is always at your disposal

Tèl: +33 1 81 86 06 03

E-mail: contact.unilux@hamelinbrands.com

17 avenue du Parc TECHNOPOLIS

91380 Chilly Mazarin – France

Tèl: +33 1 81 86 06 00

www.my-unilyx.com

E-mail: contact.unilux@hamelinbrands.com

UNILUX