



UNILUX

SNOKE



- **Robust** : the lamp clamp is made of reinforced plastic and the hose is made of high quality and durable metal to ensure long term use.
- **Simple and use to use**: clip the clamp to a surface up to 7 cm wide; table edge, shelf, bed or wardrobe... The clamp has clamping handles and soft, firm rubber pads that do not leave marks on the surface.
- **Flexible et stable** : its flexible arm can turn 360°. You can easily adjust the direction of the light to your working area. Its clamp offers excellent stability.
- **Modern and sober design** : its head shape favors a wide diffusion of light on the work surface.
- **A pleasant light**: a uniform and quality light thanks to the latest generation LEDs. These LEDs are protected by an opaque diffuser: no flickering, no glare to avoid eye fatigue
- **Energy efficient**: LED technology guarantees a very good light output for a very long service life (20,000 hours).
- **ON / OFF switch**: easy to access on the cord.

Warranty : 2 years

Maxi height : 30 cm/ mini height : 20 cm


Materials : Head and clamp in ABS plastic /metal arm with rubber surface



Professional replaceable light source (LED only)

Characteristics


Measurement in Lux on the worktop
in top view at 35 cm:

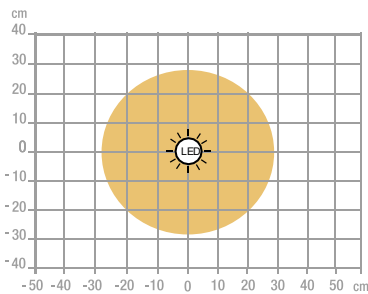


> 500 Lux

< 500 Lux

Measurement in Lux on the worktop
in profile view at 35 cm:

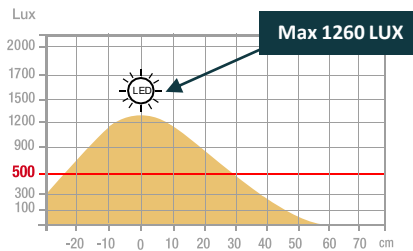

Measurement in nanometers
of the light spectrum

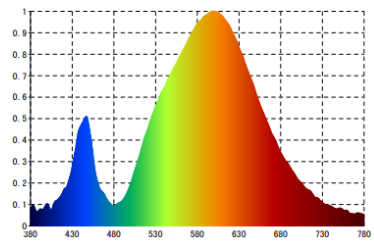


- 0 No-risk
- 1 Low-risk
- 2 Moderate-risk
- 3 High-risk

SAP no.	400166075
EAN code	3595560035106
Colors	Black
Luminous flow	190
Lux at 35cm	1260
Lm/W	63
Color T° (K)	4000
CRI	>80
Source Lifetime (h)	20 000
Energy consumption (kWh/1000 h)	3
USB Port	No
Inductive charger	No
Net weight (kg)	0,39

OUR CSR COMMITMENTS

1. Tous nos luminaires sont **100% réparables** limitant ainsi l'obsolescence programmée.
2. Réduire notre empreinte carbone grâce à notre démarche **d'ECO-DESIGN THINKING**.
3. Contribuer à la préservation des ressources naturelles de la planète en favorisant l'utilisation de **matériaux recyclés**.
4. Optimiser nos emballages pour maîtriser nos **coûts de transports**.
5. Mettre en avant le **talent de nos collaborateurs** en assurant une égalité sociale.

Energy class

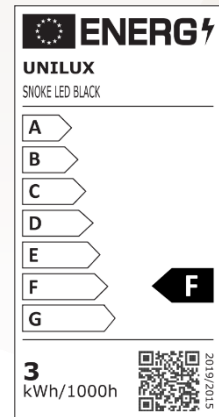


OUR EXPERTISE

1-Why use auxiliary lighting?

We are regularly subjected to constant artificial lighting in the office, which takes no account of our biological rhythms. Poor lighting quality can cause headaches, sleep disorders and loss of concentration. According to a recent study, only 34% of offices achieve the level of illumination of 500 lux recommended by Occupational Medicine in accordance with DIN EN 12464-1*.

2-How to light your workspace?

- Position the lamp head at least 35 cm above the worktop. work surface.
- Place the lamp on the opposite side to the hand that is holding the mouse or writing.
- Use lamps with asymmetrical lighting to reduce eyestrain, which can lead to eye irritation, headaches, loss of concentration, reduced productivity, etc.
- Position the lamp so that it is easy to adjust and so that the light is in the right place.
- Avoid reflections from shiny surfaces.
- Limit direct glare from bright light in the field of vision and indirect glare from bright light in the field of vision. in the field of vision and indirect glare from the reflection of light from the reflection of light in the field of vision, on a work surface walls or objects.

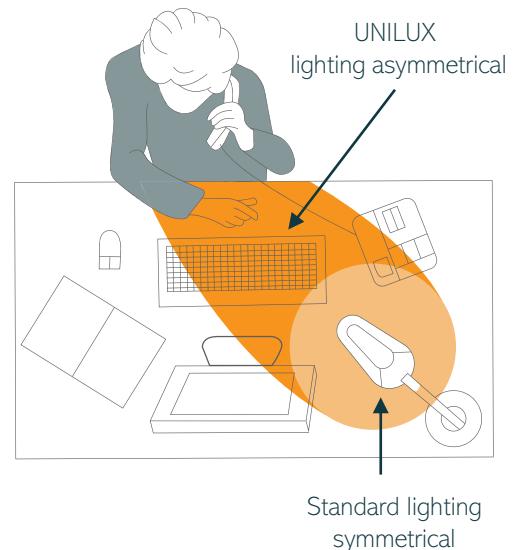

OUR CERTIFICATIONS


Unilux is committed to an eco-responsible approach and ensures that its products respect this commitment. Indeed, we are very concerned about current environmental issues and we aspire to respond as best as possible to the concerns of our consumers on this subject. Sustainable development is at the heart of our strategy and we act for the environment. You will find below the different certifications that Unilux has and that prove its environmental commitment.




UNILUX

* DIN EN 12464-1 (DIN 5035-1): European standard which determines the lighting requirements for workstations in closed places, these satisfying the needs of comfort and visual performance. DIN EN 12464-1 replaced DIN 5035-1

USER GUIDE

i
x1
1 min

www.my-unilux.com

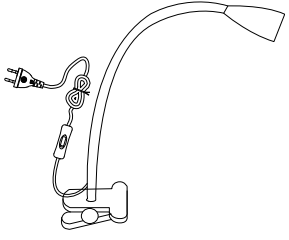+
Ⓐ
x1



Flexible : 28,0 cm

Ⓐ

25,0 cm

Ecart maxi: 5 cm

30 products available on pCon Planner

You will be able to obtain data on many UNILUX or OFML standard products and integrate them quickly and easily into 3D space layouts via pCon.



Download on our E-shop

Always available: photos in HD, data sheets, instruction manual, repairability instructions for all our products.



Do you have any questions?

Our after-sales service is always at your disposal

Tèl: +33 1 81 86 06 03

E-mail: contact.unilux@hamelinbrands.com

17 avenue du Parc TECHNOPOLIS

91380 Chilly Mazarin – France

Tèl: +33 1 81 86 06 00

www.my-unilyx.com

E-mail: contact.unilux@hamelinbrands.com

UNILUX