




UNILUX

VERSUS

VERSUS

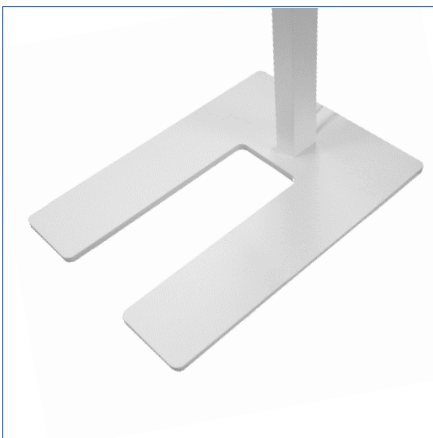

Discover modern elegance with our VERSUS uplighter, offering intelligent direct and indirect lighting, complemented by a U-shaped base for a touch of style and functionality.

UNILUX

VERSUS



- **Double effect** : 50 % glare-free direct lighting combined with 50 % indirect lighting ensures ideal light distribution in your working environment.
- **Light intensity dimming** : with its three levels of light intensity, VERSUS provides constant and flicker-free illumination, protecting your eyes.
- **Smart** : with its touch-sensitive control, VERSUS makes it easy to adjust light intensity and selecting upward or downward orientation, or both simultaneously.
- **Stability** : the 8 mm thick sheet metal base ensures the good stability of the uplighter. Its U-shaped base slides easily around your desk.
- **Design** : its clean, airy lines mean it can blend in with both classic and modern décor.

Warranty : 2 years

Height : 196 cm


Touch panel height : 112 cm

Materials : aluminium with EPOXY paint



Features


Measurement in Lux downwards at 110 cm from the light source :

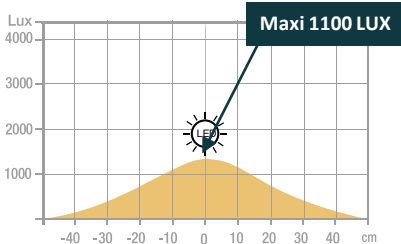

> 500 Lux

< 500 Lux


Measurement in Lux upwards at 50 cm from the light source :

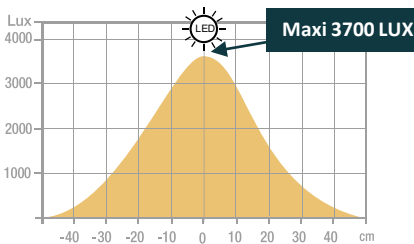

> 500 Lux

< 500 Lux

Measurement in nanometers of the light spectrum :

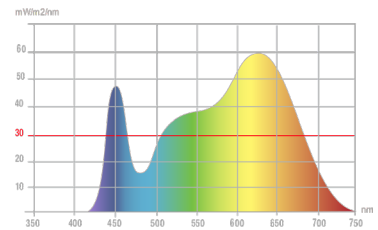


- 0 No-risk
- 1 Low-risk
- 2 Moderate-risk
- 3 High-risk

SAP. code	400191230	400188812
EAN code	3595560041510	3595560041053
Color	White	Black
Luminous flux (Lm)	8150	8150
Lux at 110 cm direct (Lx)	1100	1100
Lux à 50 cm indirect (Lx)	3700	3700
Energy efficiency (Lm/W)	142	142
Color temperature (K)	4000	4000
CRI	84	84
Source lifespan (h)	40 000	40 000
Energy consumed (kWh/1000 h)	57	57
Net weight (kg)	10.9	10.9

ENVIRONMENT

UNILUX focuses on sustainable development and takes concrete measures to reduce its environmental footprint and best meet the evolving expectations of its consumers.

We are notably committed to reduce our greenhouse gas emissions by 29% between 2021 and 2030 in response to the "Net Zero Carbon Emissions by 2050" challenge. Eco-design, emissions reduction and continuous improvement are at the core of our concerns.

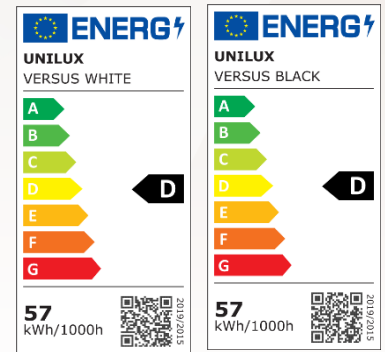


OUR EXPERTISE

Direct and indirect lighting : the ideal and optimal lighting for your office

Direct lighting involves directing light directly onto a specific surface or area, without diffusion or reflection. It creates sharp shadows and strong contrasts, highlighting areas where intense brightness is required.

On the other hand, indirect lighting is characterized by the reflection of light off surrounding surfaces, providing a soft and uniform ambiance without producing pronounced shadows.

Our floor lamps offer both direct and indirect lighting, thus catering to various activities (reading, writing, data processing, etc.) and lighting needs.

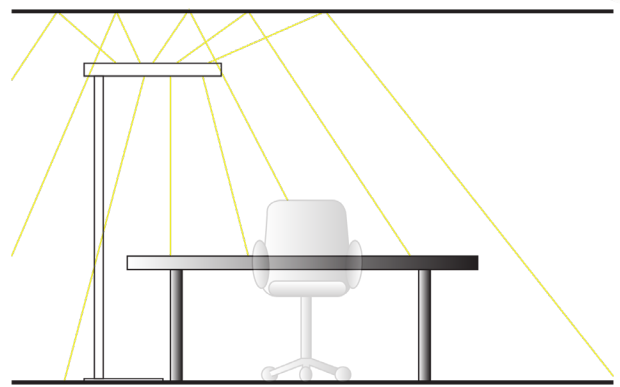

Recommended illuminance levels according to DIN EN 12464-1* standard for the office:

- 300 Lux : filing, copying, circulation areas
- 500 Lux : writing, reading, data processing
- 500 Lux : reception and counters
- 750 Lux : technical drawing

* Norme qui fixe les limites que doit respecter l'éclairage des lieux de travail.

ABOUT UNILUX

Founded in 1952, UNILUX is a French company specializing in lighting and ergonomics. Over the past 25 years, UNILUX has become a benchmark in the field of lighting in France and throughout Europe. In 2000, UNILUX joined the French group HAMELIN, a European leader in stationery. The company modernizes and evolves to become a creator of ambiance and well-being.

OUR CERTIFICATIONS



pCon Planner

Integrate Unilux products seamlessly into your 3D space designs.
Access to essential data : dimensions, prices, etc.



Website





Explore our full range, tips, blog articles, and more.



Do you have any questions ?

Our customer service is always available to assist you.

GLOSSARY

-  ON / OFF
-  Tactil light intensity dimming
-  Replaceable light source (LED only) by a professional.
-  European compliance