



UNILUX

FIRST LED

FIRST LED



FIRST LED floor lamp, single or hinged, with ON/OFF switch at the foot, providing high-quality lighting for a cosy, pleasant atmosphere. Its diffuser allows you to direct the light.

FIRST LED



Easy to use: its switch located on the cord allows you comfortable lighting for reading, writing and working.
Longevity and quality: the lifespan of its LEDs is estimated at more than 40,000 hours.
Soft and modern design: its finesse and sober lines will bring a modern look to your office.
Stability: its weighted base ensures perfect stability of the floor lamp in areas of large passages.
Uniform light diffusion: indirect lighting without glare.
Available in two colors: black or metal gray
Available in two versions: straight mast or articulated mast


Warranty: 2 years
 Height: 183 cm (straight mast version)
 Maximum height: 186 cm/ minimum height: 174 cm (articulated mast version)
 Head: Ø 28 cm
 Base of the floor lamp in stable metal: 2 Kg
 Materials: top quality steel base, mast and head with Epoxy paint finish




Professional replaceable light source (LED only)

Characteristics

Lux measurement upwards 55 cm from the light source:

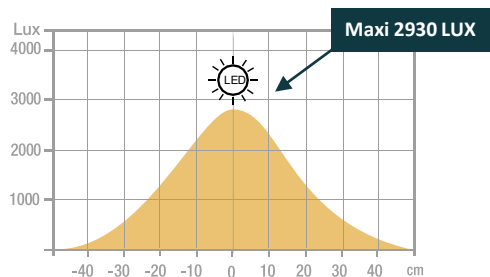

Measurement in nanometers of the light spectrum

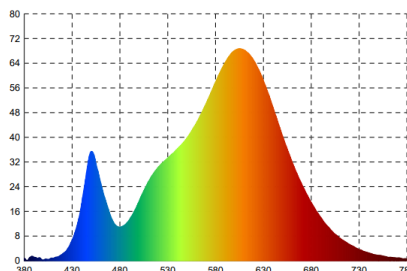


SAP. code	400153696	400153695	400153694
EAN code	3595560031733	3595560031719	3595560031696
Colors	Black	Grey metal	Black articulated
Luminous flow (Lm)	3271	3271	3271
Lux at 55 cm (indirect)	2930	2930	2930
Luminous Efficiency (Lm/W)	148	148	148
Color T° (K)	3000	3000	3000
CRI	83	83	83
Source's lifetime (h)	40 000	40 000	40 000
Energy Consumption (kWh/1000h)	22	22	22
Net weight (kg)	5,45	5,45	8,45

OUR CSR COMMITMENTS

1. All our lighting are **100% repairable** thus limiting planned obsolescence.
2. Reduce our carbon footprint through our **ECO-DESIGN THINKING** approach.
3. Contribute to the preservation of the planet's natural resources by promoting the use of **recycled materials**.
4. Optimize our packaging to control our **transport costs**.
5. Highlight the **talent of our employees** by ensuring social equality.

Energy class

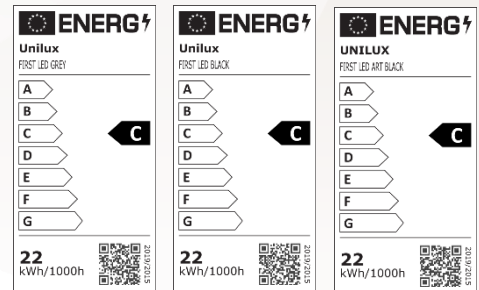


OUR EXPERTISE

1- Floor lamp with direct and indirect lighting: the ideal and optimal lighting on your desk

Because they're so easy to install and so decorative, indirect-lighting floor lamps are a firm favourite with the French! This floor lamp is ideal for illuminating a specific area of a room, or for adding a small, original decorative touch that will change the whole atmosphere of the room.

Thanks to its upward-directed light, which will reverberate off the ceiling, this floor lamp generally acts as a secondary or ambient light, providing you with high quality, high-performance lighting. It blends in perfectly with any room in your business:

- individual office
- open space
- meeting rooms
- high-traffic areas such as reception halls

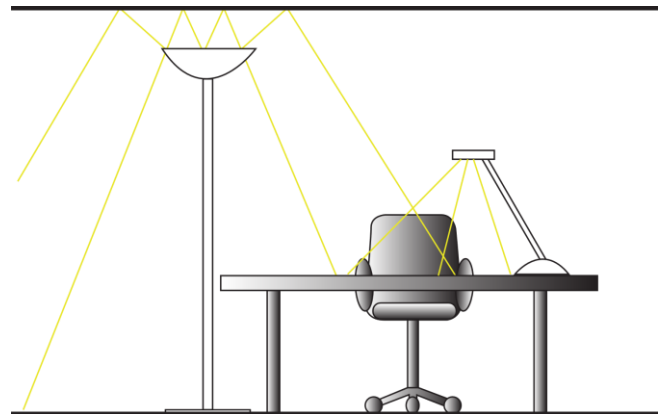

Lighting according to DIN EN 12464-1 * for the office

- **300 Lux:** deposit, copy, circulation areas
- **500 Lux:** writing, reading, data processing
- **500 Lux:** at the reception and at the counter
- **750 Lux:** technical drawing

OUR CERTIFICATIONS





Unilux is committed to an eco-responsible approach and ensures that its products respect this commitment. Indeed, we are very concerned about current environmental issues and we aspire to respond as best as possible to the concerns of our consumers on this subject. Sustainable development is at the heart of our strategy and we act for the environment. You will find below the different certifications that Unilux has and that prove its environmental commitment.




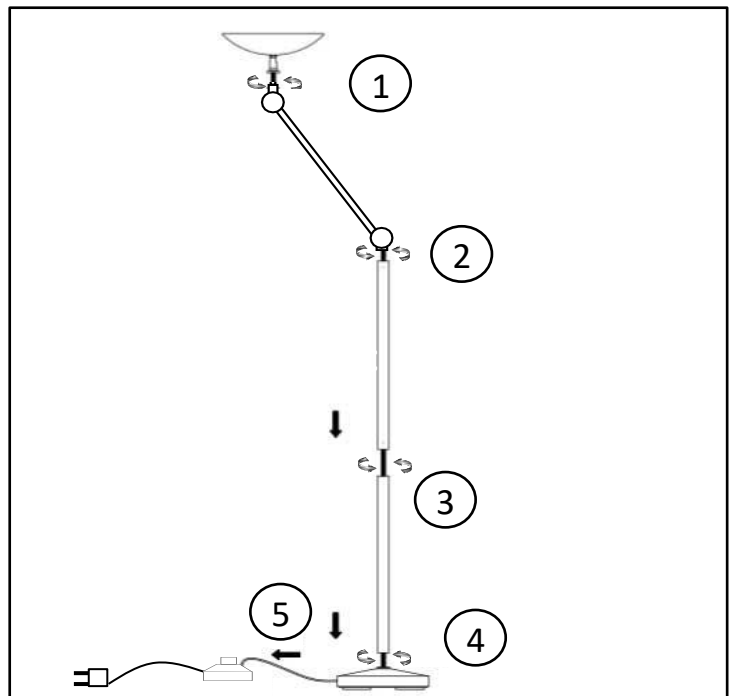
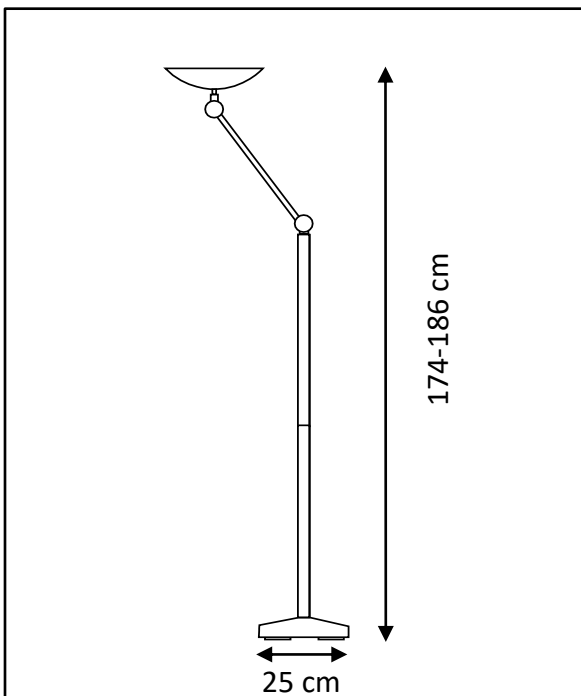
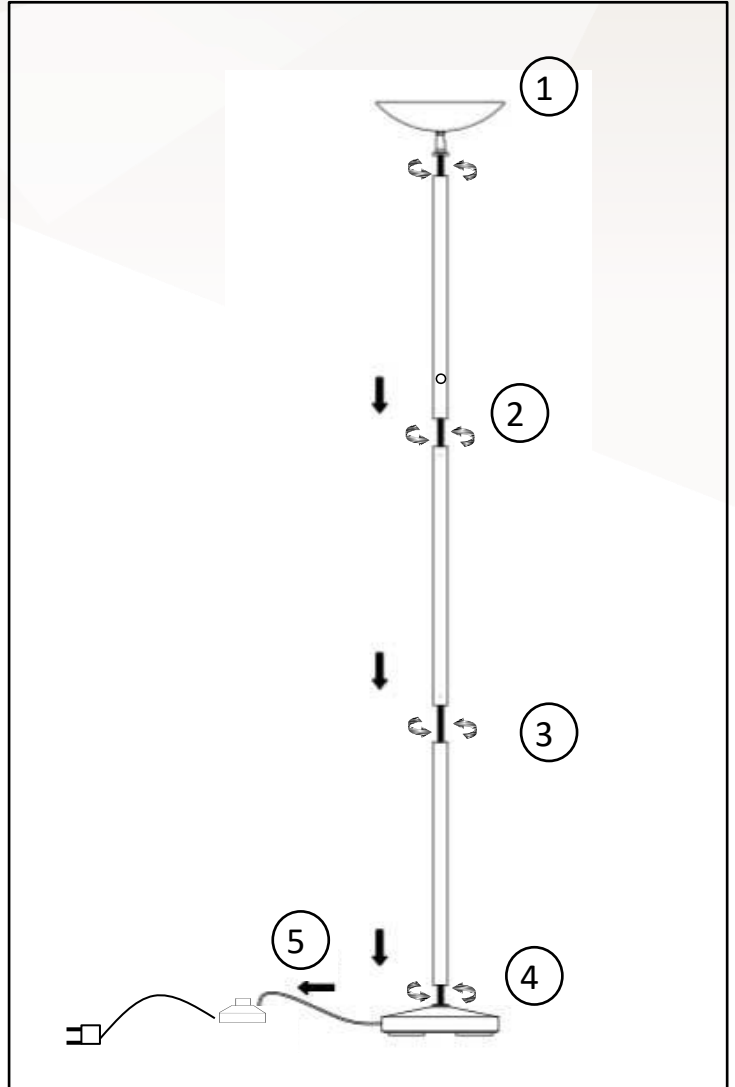
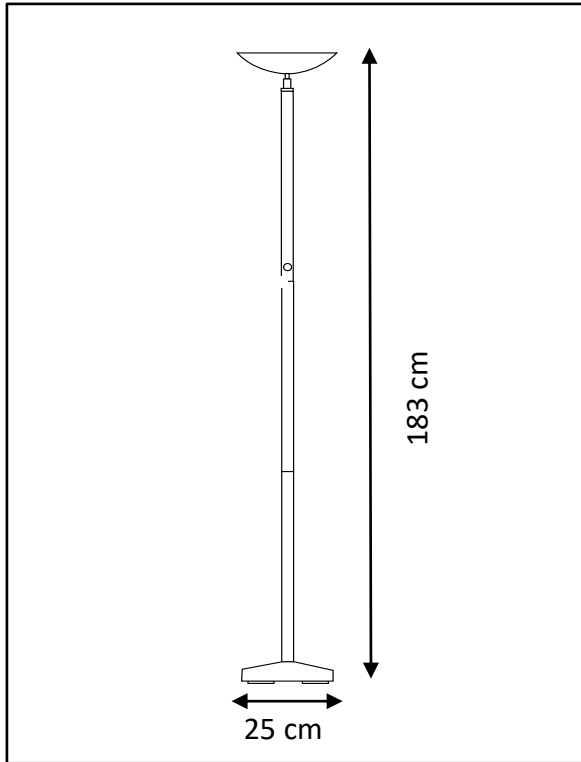
UNILUX

* DIN EN 12464-1 (DIN 5035-1): European standard which determines the lighting requirements for workstations in closed places, these satisfying the needs of comfort and visual performance. DIN EN 12464-1 replaced DIN 5035-1

USER GUIDE

  x1  5 min 

 www.my-unilux.com



30 products available on pCon Planner

You will be able to obtain data on many UNILUX or OFML standard products and integrate them quickly and easily into 3D space layouts via pCon.



Download on our E-shop

Always available: photos in HD, data sheets, instruction manual, repairability instructions for all our products.



Do you have any questions?

Our after-sales service is always at your disposal

Tèl: +33 1 81 86 06 03

E-mail: contact.unilux@hamelinbrands.com

17 avenue du Parc TECHNOPOLES

91380 Chilly Mazarin – France

Tèl: +33 1 81 86 06 00

www.my-unilyx.com

E-mail: contact.unilux@hamelinbrands.com

UNILUX